

AP-RECEIVED	FILED	FIG.
BY	CLASS	SUBCLASS
DRAFTED		

5796183

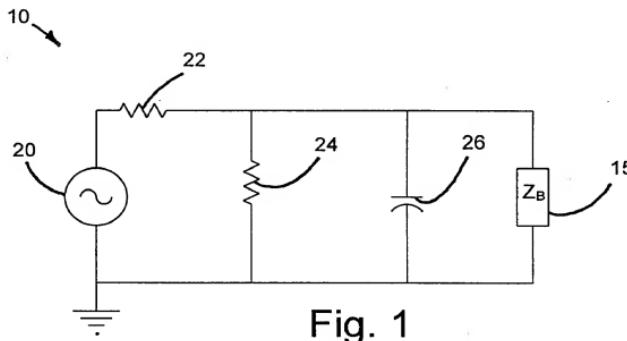


Fig. 1

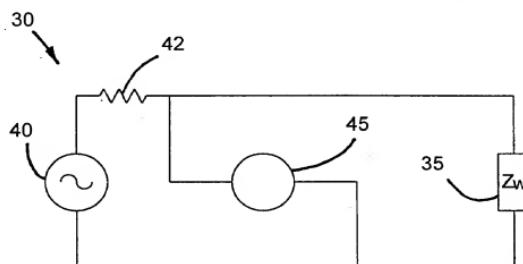


Fig. 2

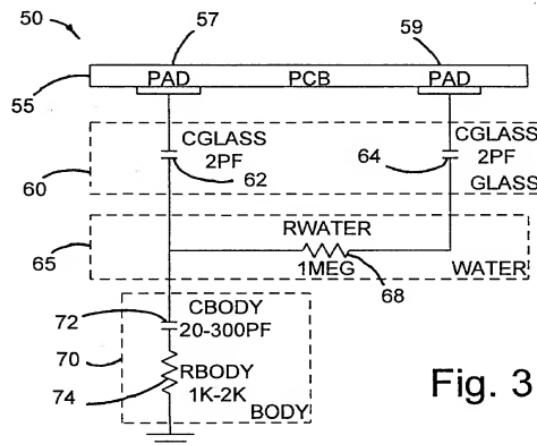


Fig. 3

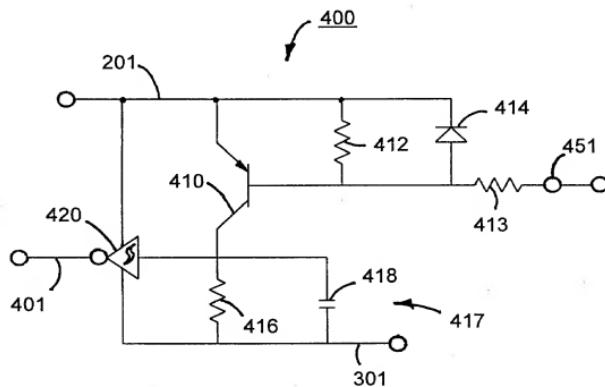


Fig. 8

APPROVED	BY	DATE
COPY	CLASS	
DRAFTSMAN		

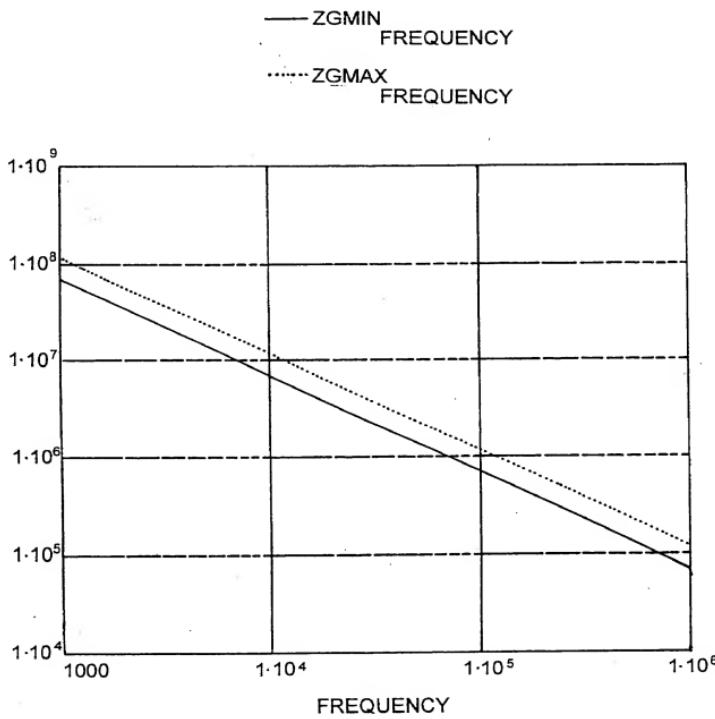


Fig. 3A




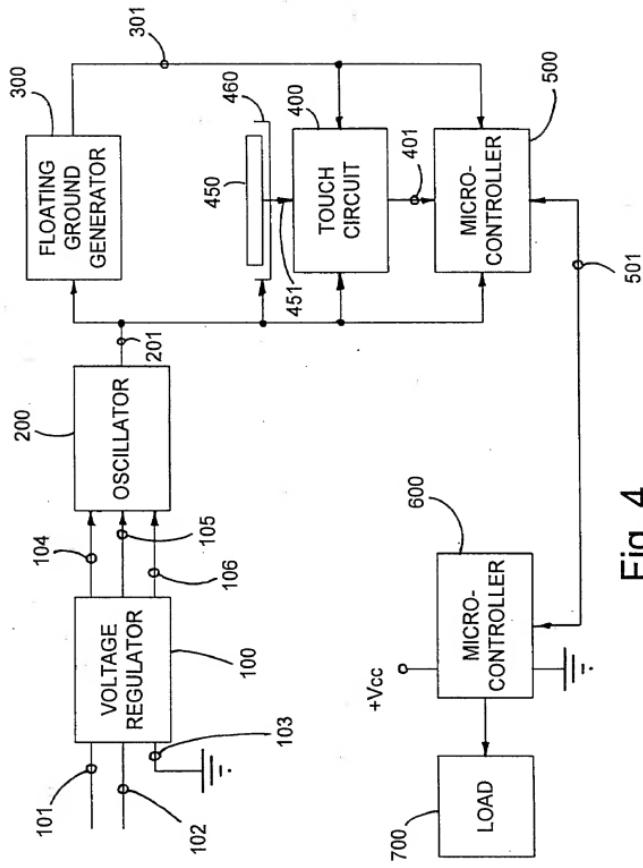


Fig. 4

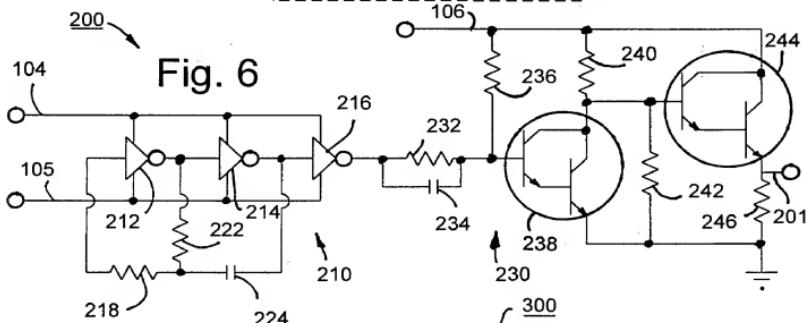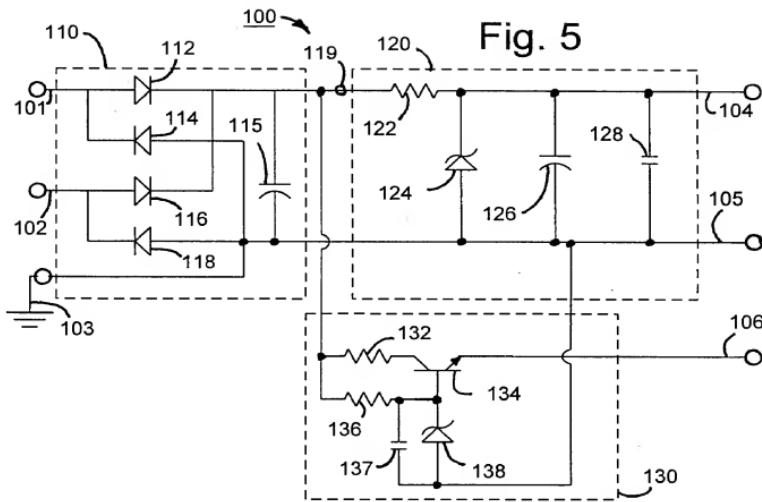

S/N VS. BODY CAPACITANCE
TEMPERATURE = 105°C

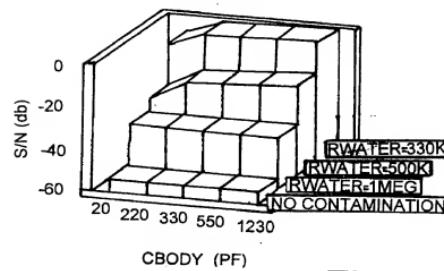


Fig. 9

S/N VS. BODY CAPACITANCE
TEMPERATURE = 25°C

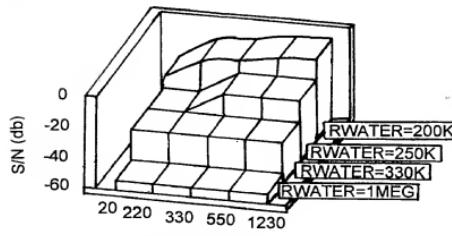
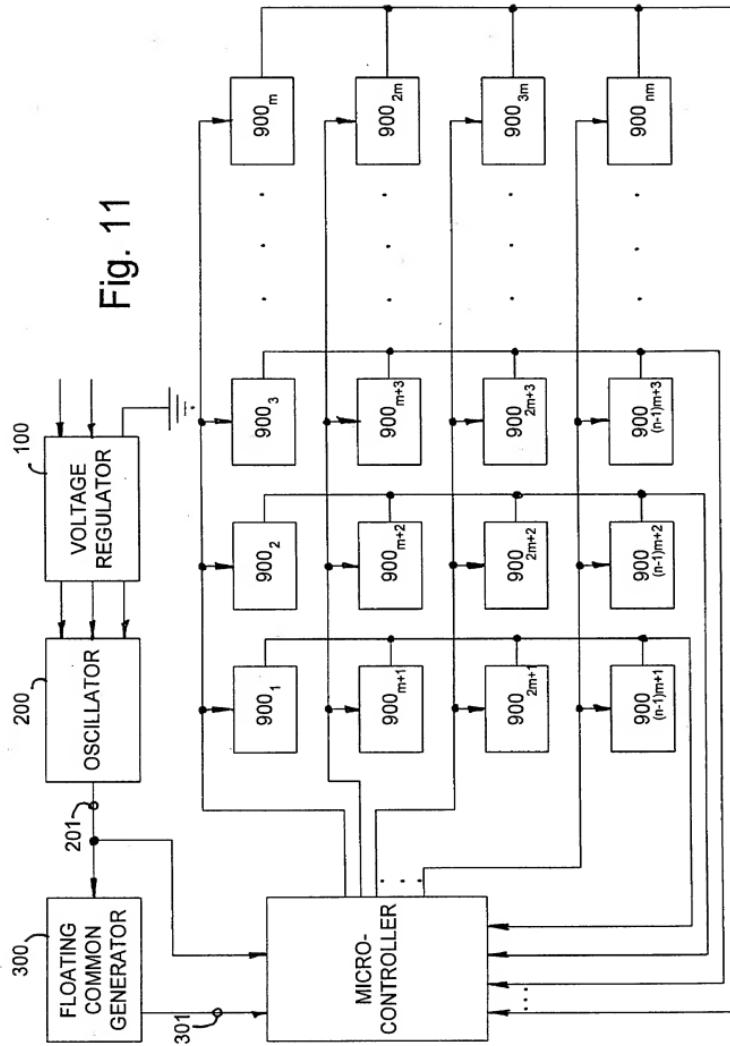


Fig. 10

Fig. 11



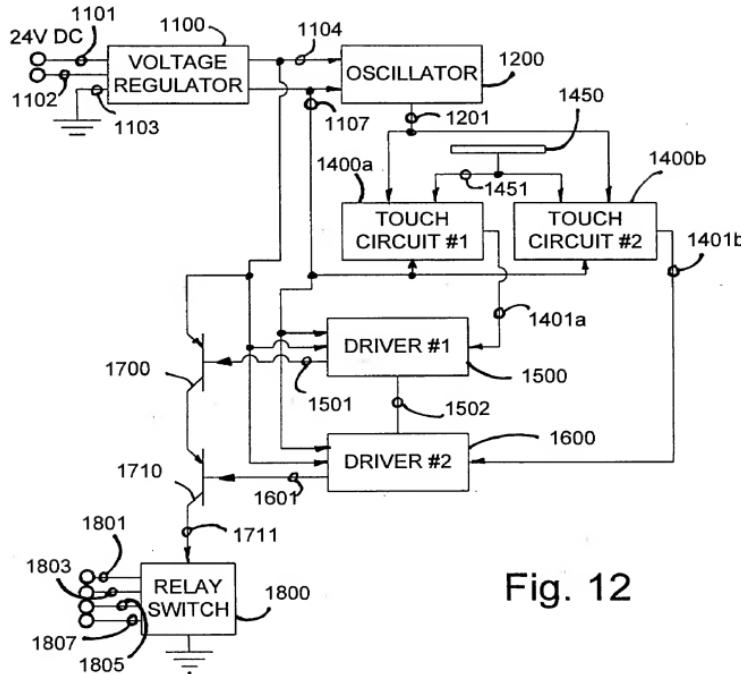


Fig. 12

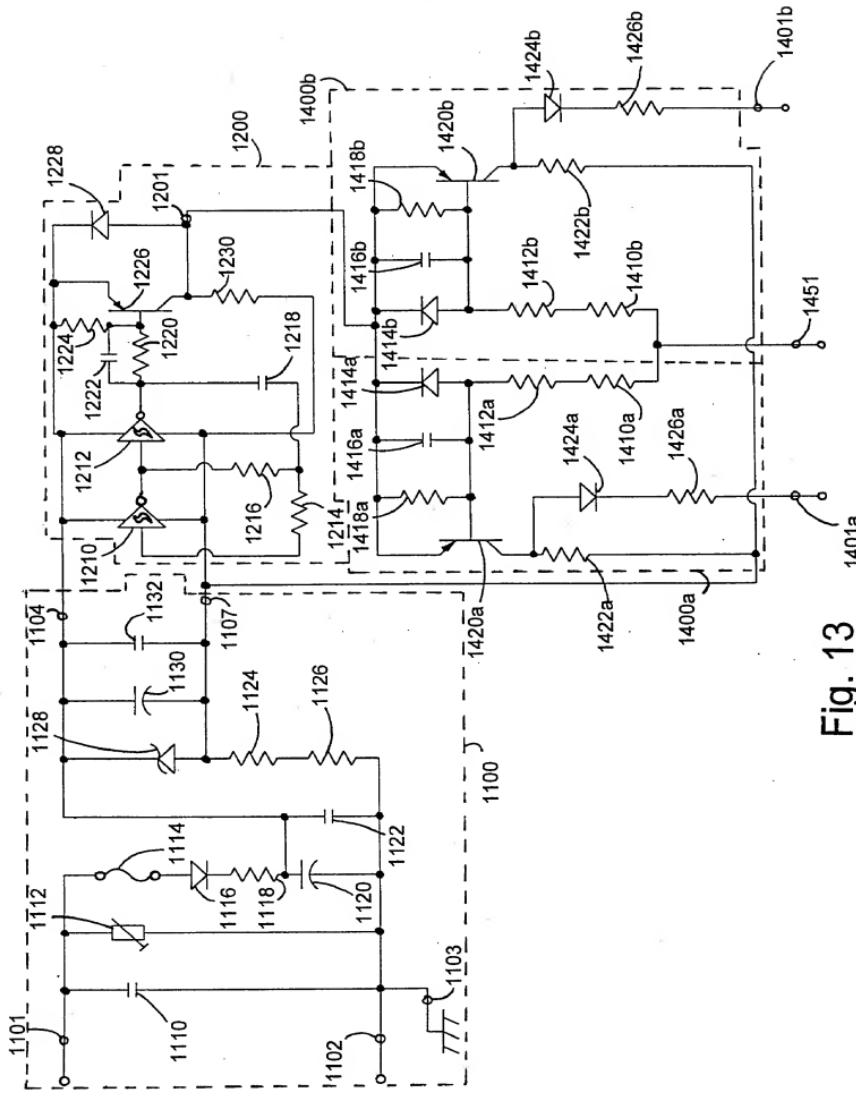


Fig. 13

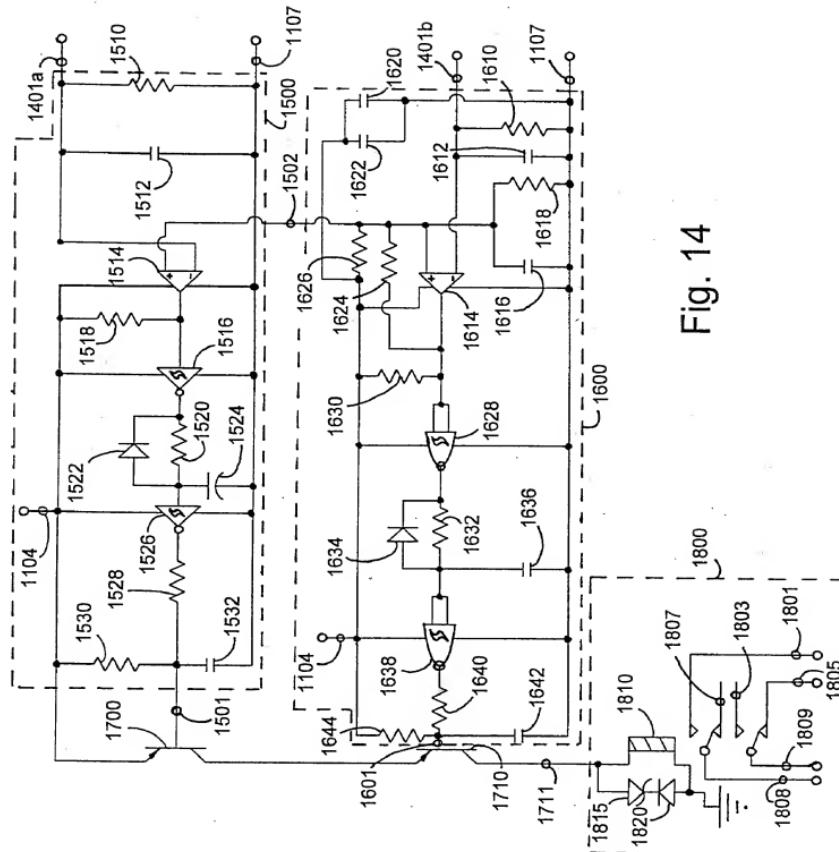
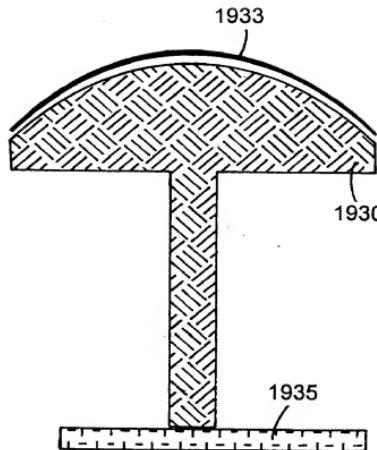





Fig. 14

APPROVED
BY GLASS GUEGLASS
DRAFTSMAN



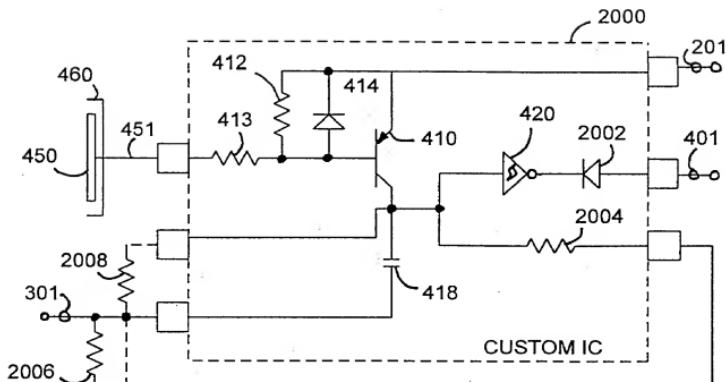


Fig. 17

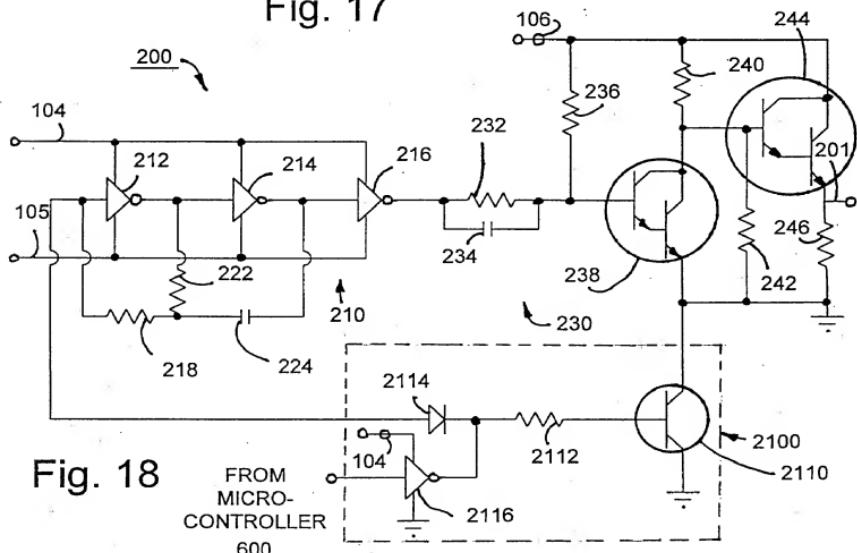


Fig. 18

FROM
MICRO-
CONTROLLER

